

SUBSTITUTE SHEET (RUI F 26)

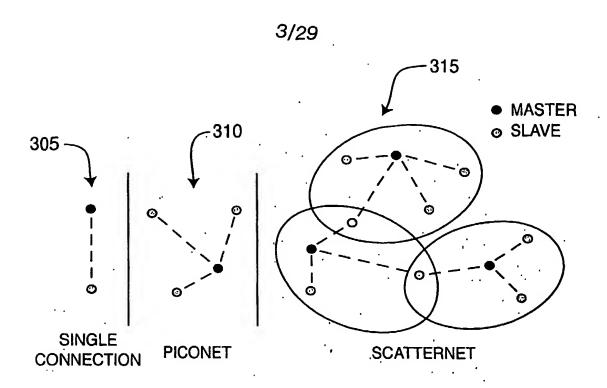


FIG. 3

400

PICONET MAC PROTOCOL: POLLING



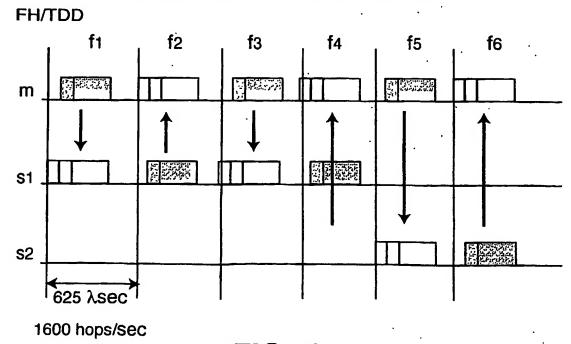


FIG. 4
SUBSTITUTE SHEET (RUI F 26)

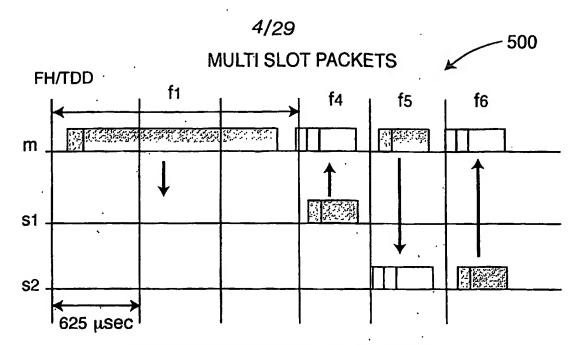

DATA RATE DEPENDS ON TYPE OF PACKET

FIG. 5



- ☐ SYNCHRONOUS CONNECTION ORIENTED (SCO) LINK▷ SLOT RESERVATION AT FIXED INTERVALS
- ASYNCHRONOUS CONNECTION-LESS (ACL) LINK
 POLLING ACCESS METHOD



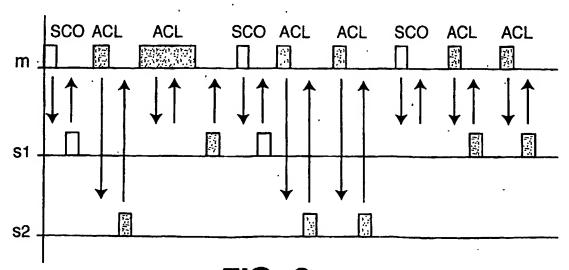


FIG. 6

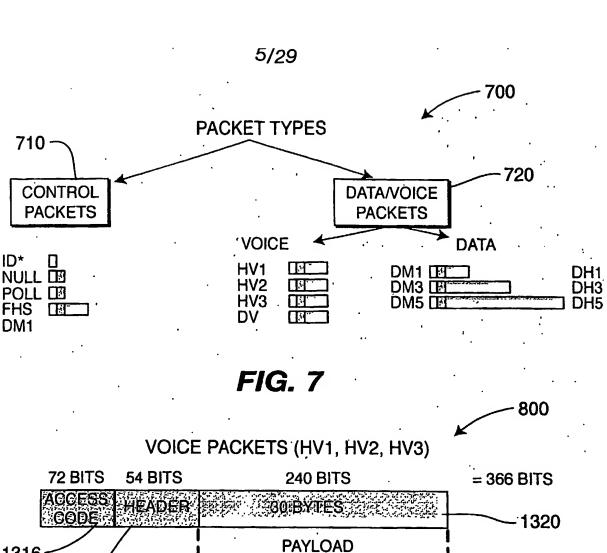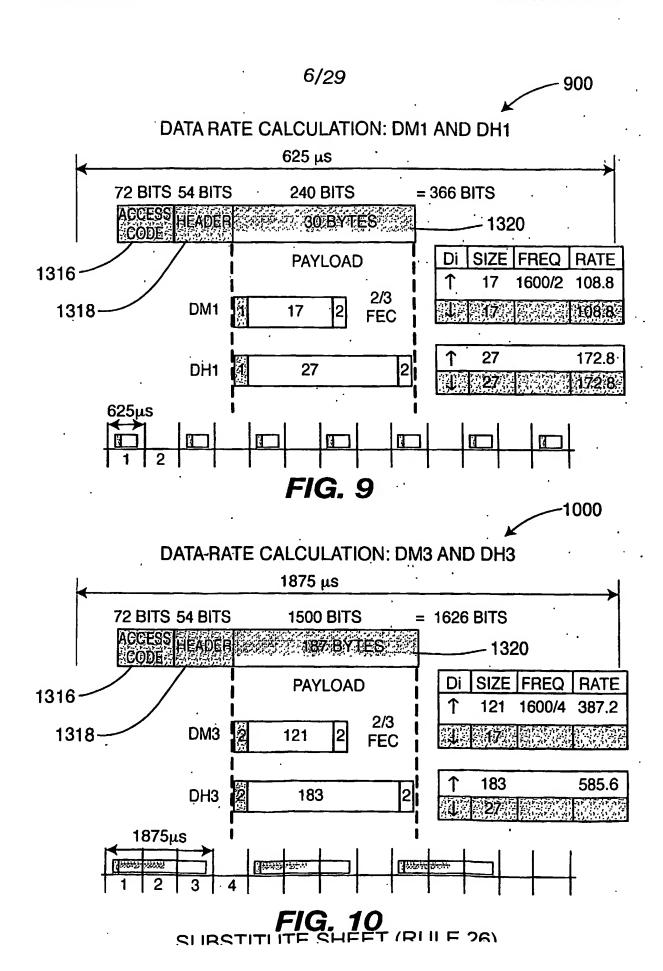

1316 HV1 10 BYTES. + 1/3 FEC 1318 HV2 20 BYTES + 2/3 FEC HV3 30-BYTES 3.75ms (HV3) 2.5ms (HV2) 1.25mş (HV1)

FIG. 8




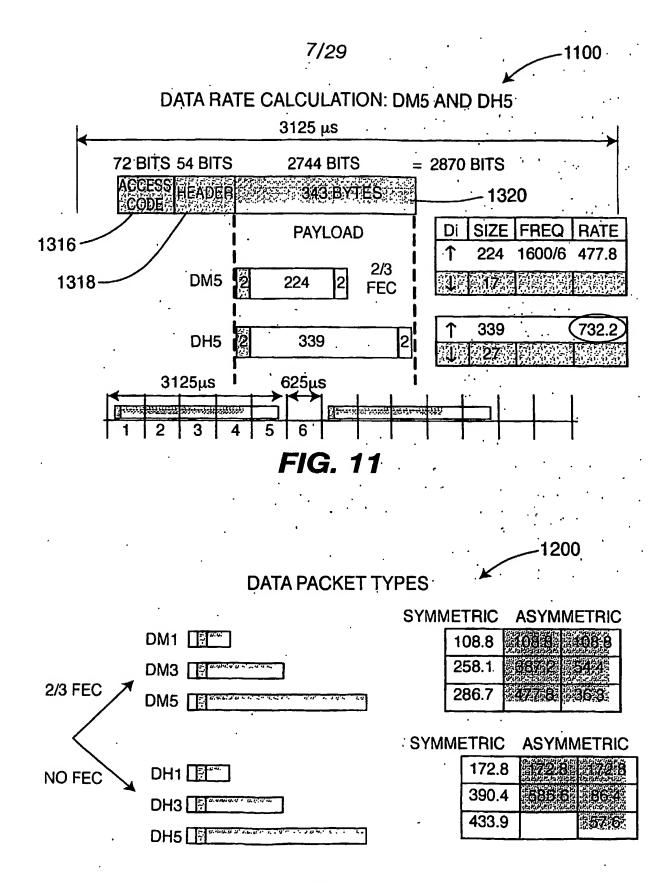


FIG. 12 SUBSTITUTE SHEET (RULE 26)

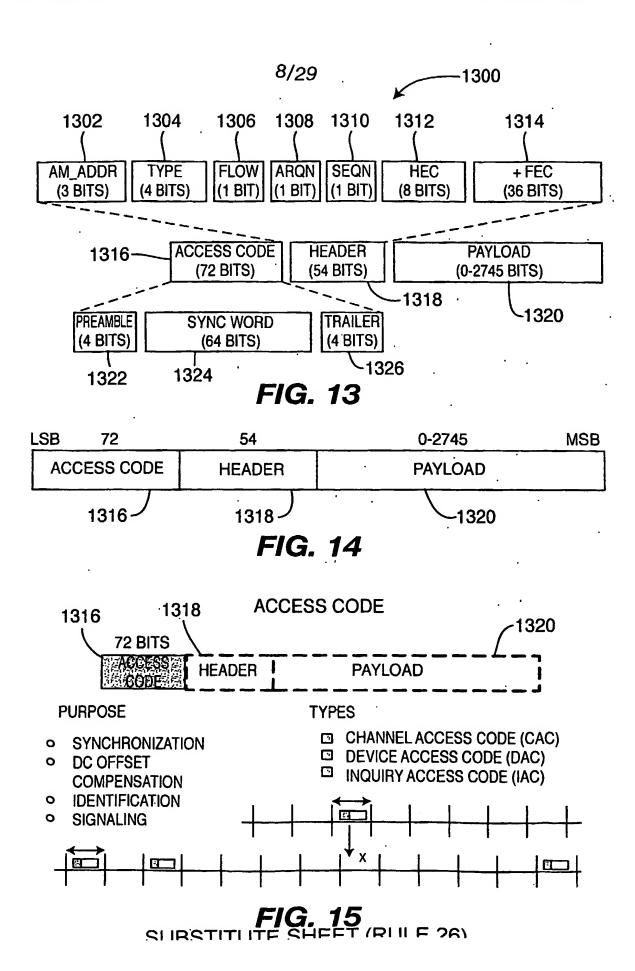

WO 2005/057956



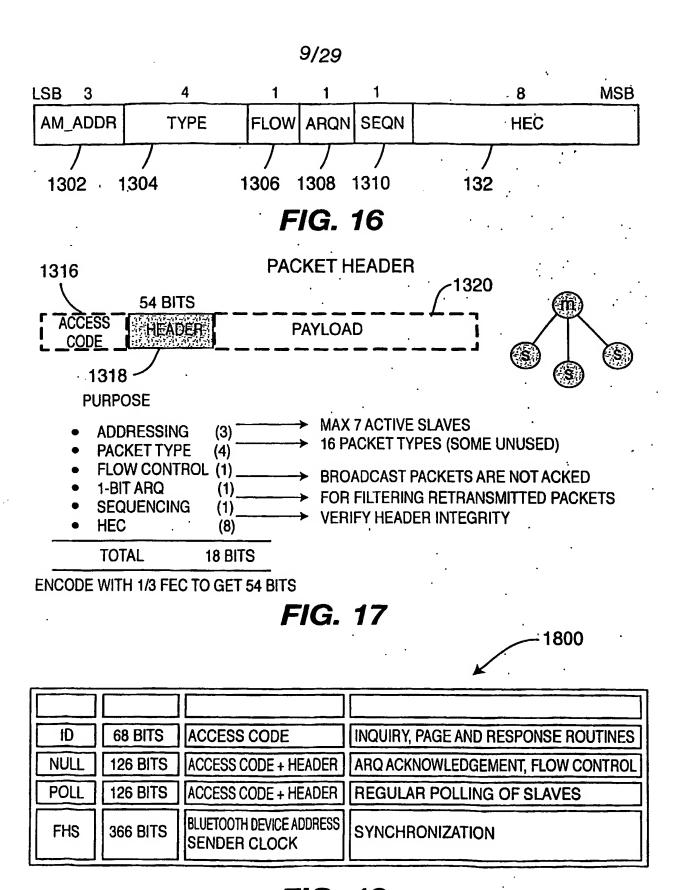


FIG. 18
SUBSTITUTE SHEET (RULE 26)

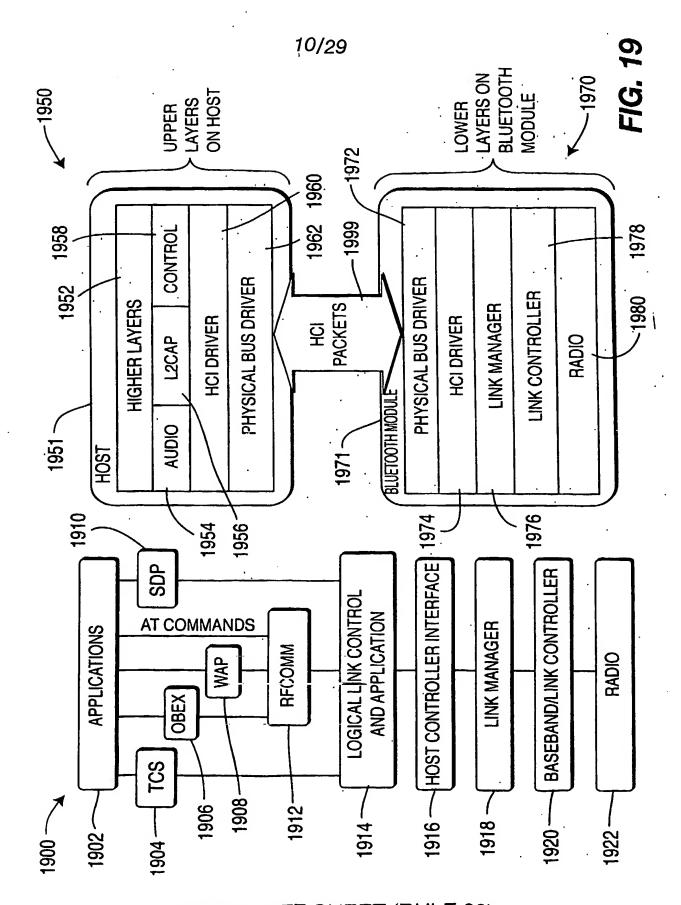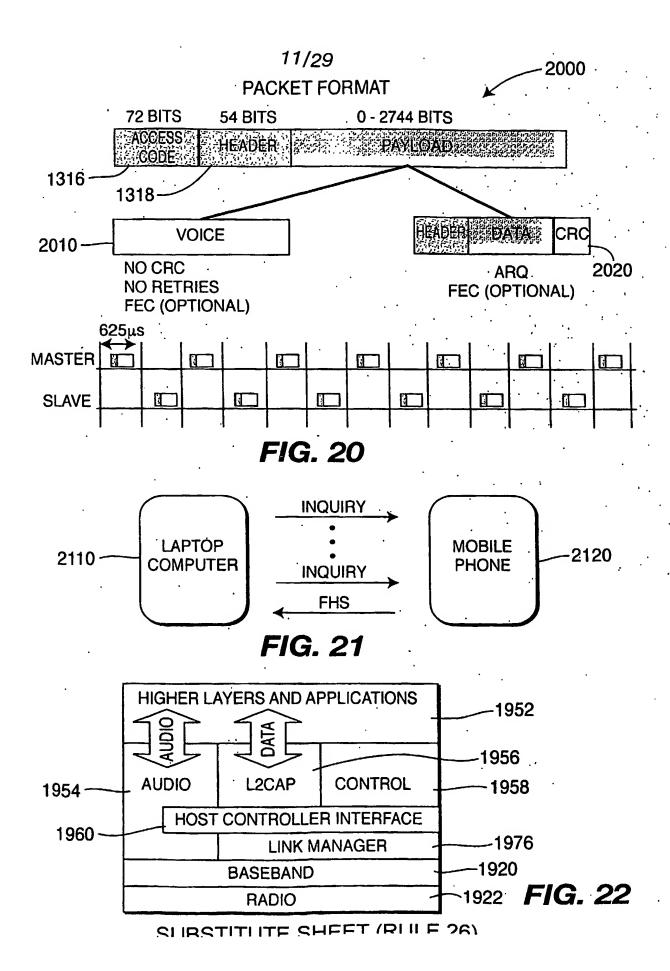

SUBSTITUTE SHEET (RUILE 26)

WO 2005/057956



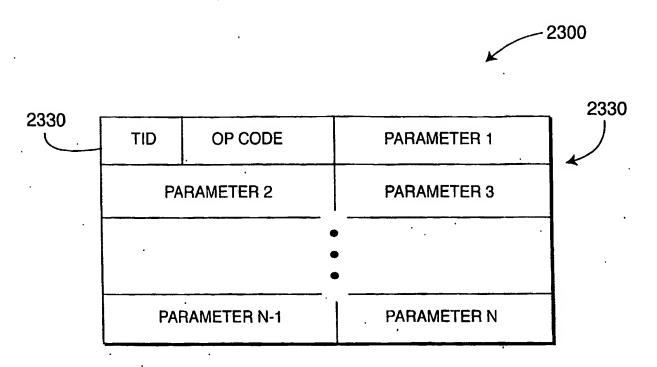


FIG. 23

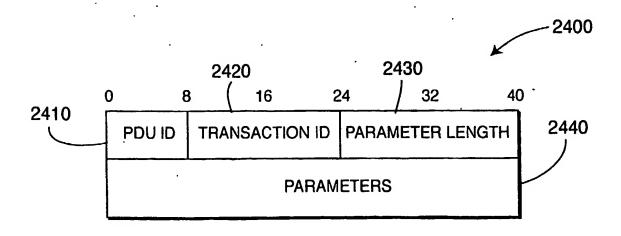


FIG. 24



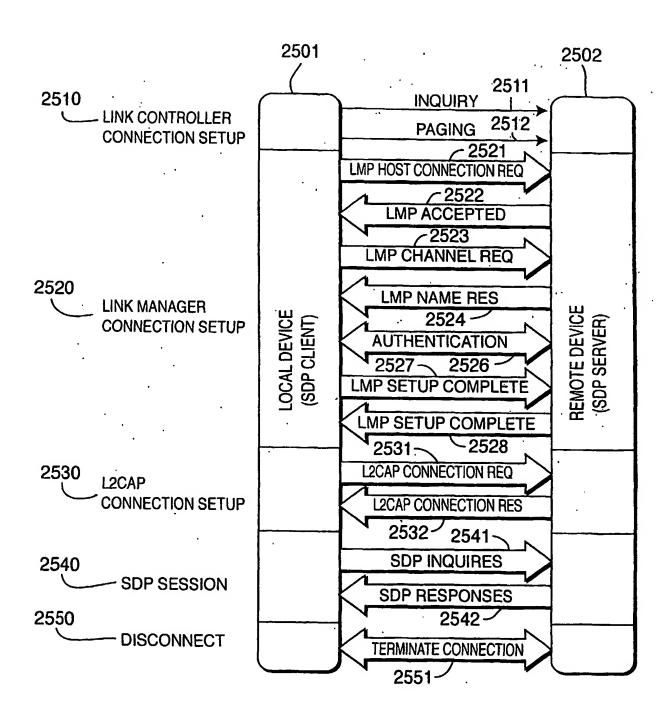



FIG. 25

PCT/US2004/014854

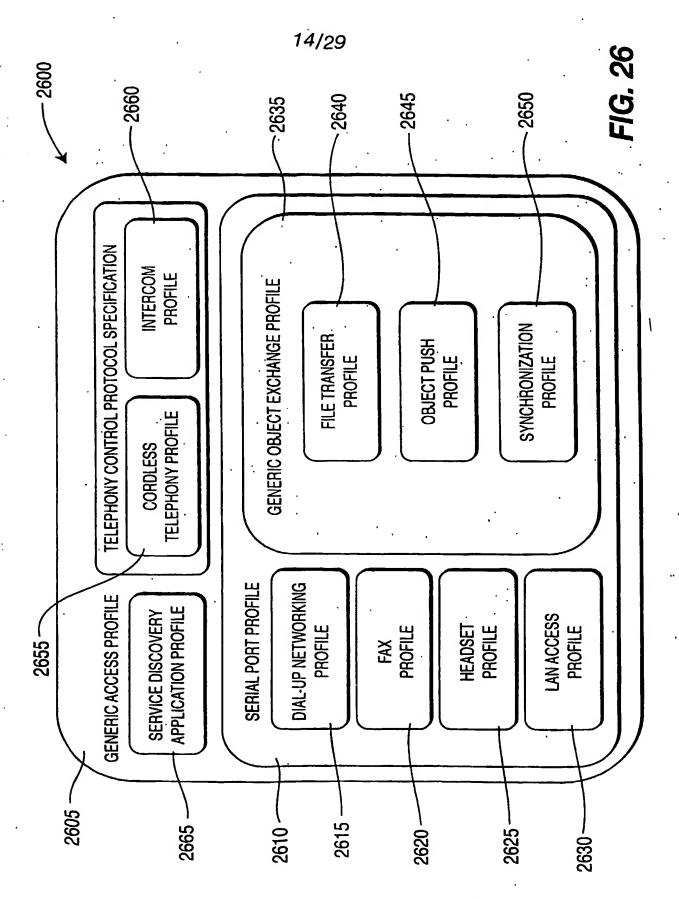

SUBSTITUTE SHEET (RUILE 26)

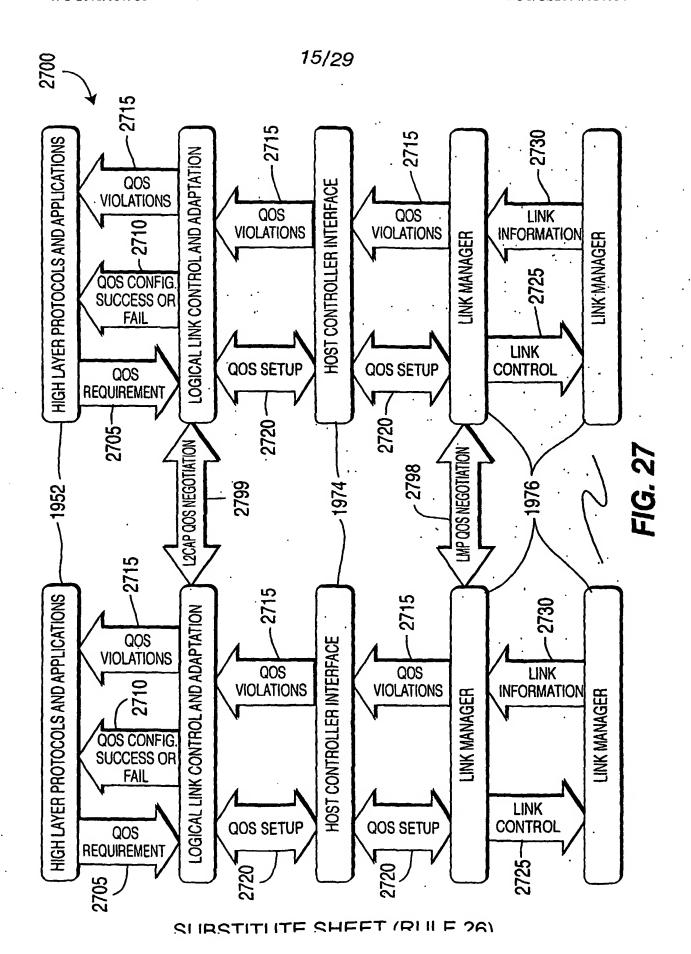

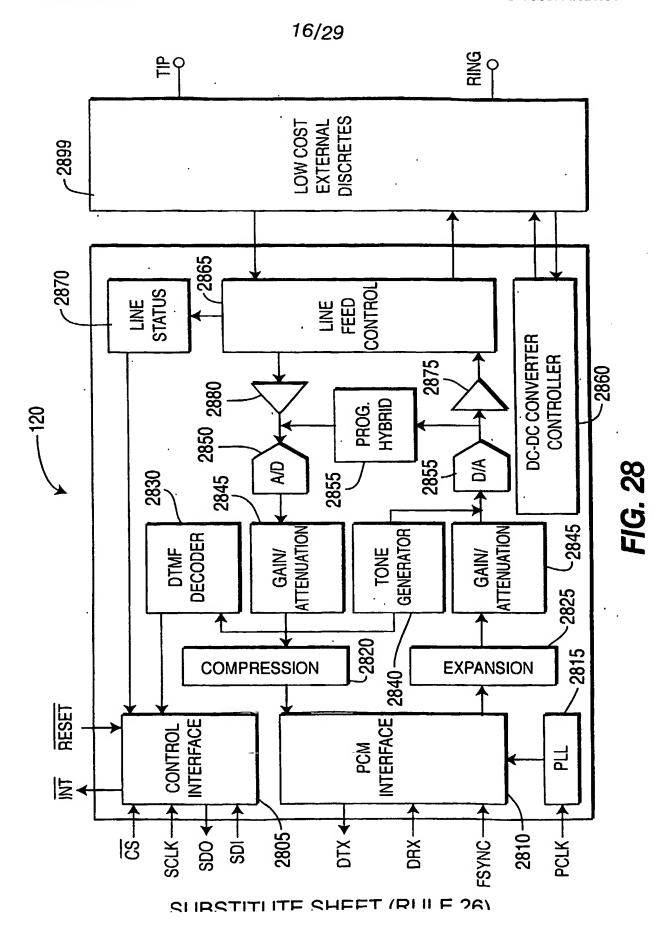

17/29



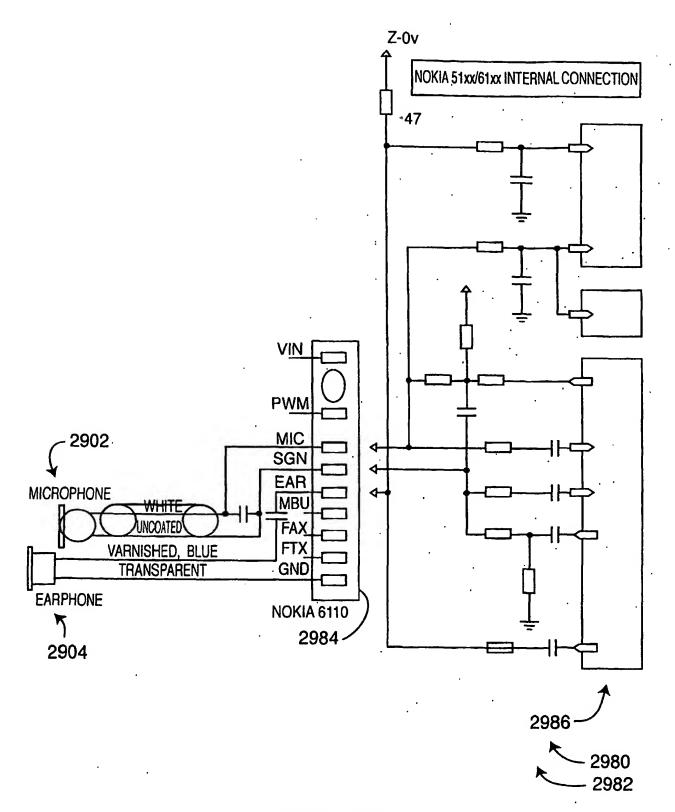


FIG. 29

SUBSTITUTE SHEET (RUI F 26)

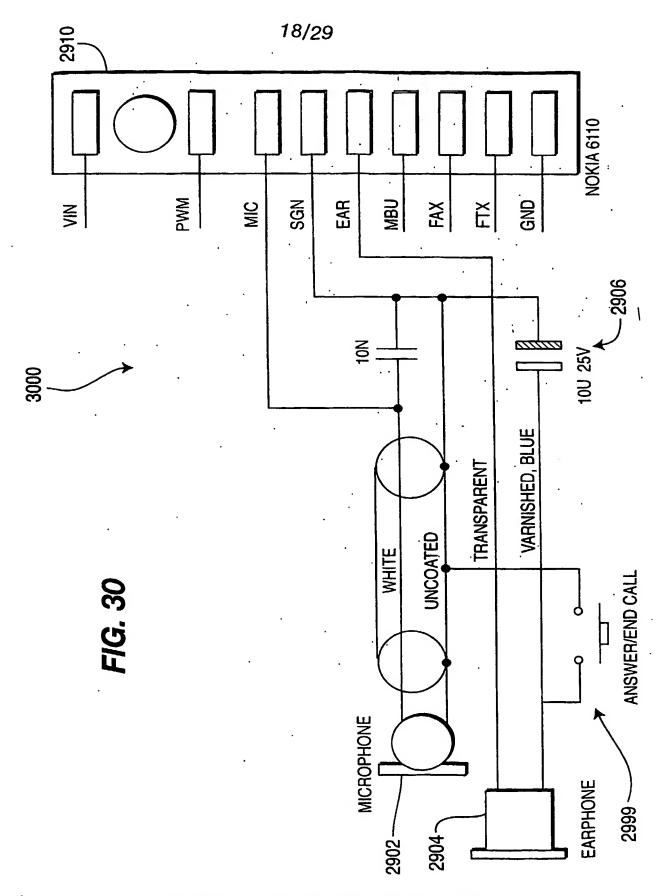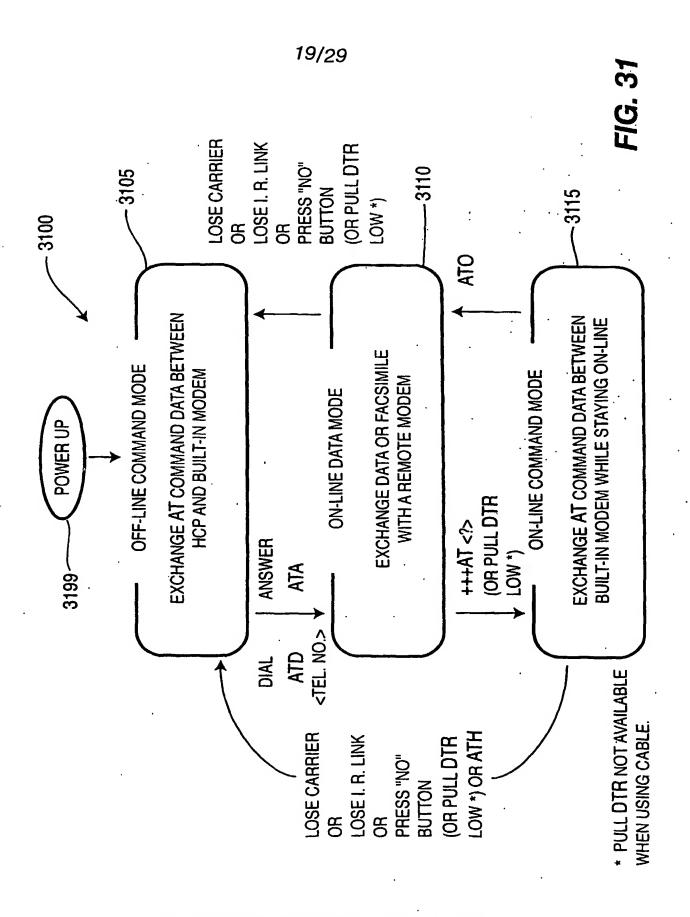

SURSTITUTE SHEET (RUI F 26)



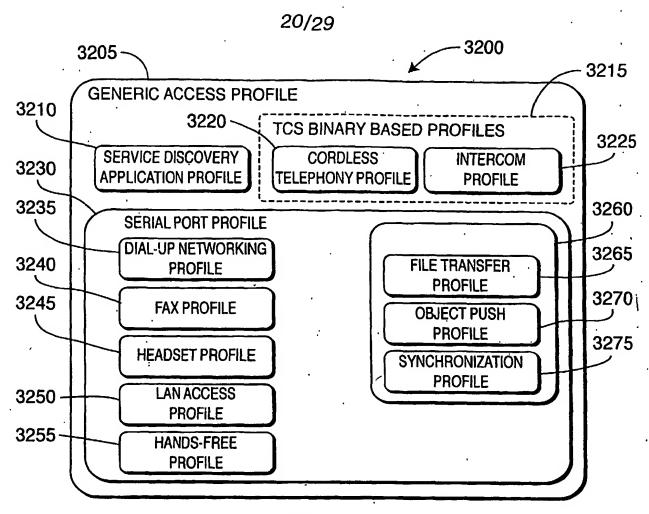


FIG. 32



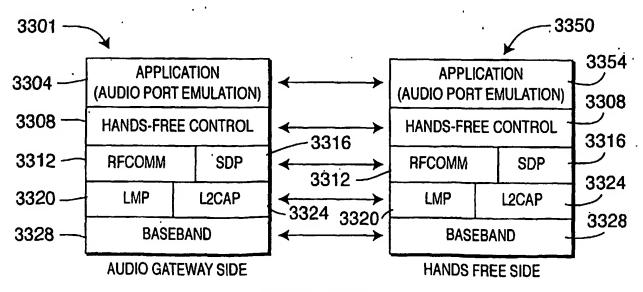


FIG. 33

	21/29														•						
	SUPPORT IN HE.	M	M(note 1)	Σ	×	M	Δ.	M	0	0	0	0	O(note 2)	0	0	0	0	0	0	3480	
3450	3 FEATURE	1. CONNECTION MANAGEMENT	2. PHONE STATUS INFORMATION	3. AUDIO CONNECTION HANDLING	4. ACCEPT AN INCOMING VOICE CALL	5. REJECT AN INCOMING VOICE CALL	6. TERMINATE A CALL	7. AUDIO CONNECTION TRANSFER DURING AN ONGOING CALL	8. PLACE A CALL WITH A PHONE NUMBER SUPPLIED BY THE HF	9. PLACE A CALL USING MEMORY DIALING	10. PLACE A CALL TO THE LAST NUMBER DIALED	11. CALL WAITING NOTIFICATION	12. THREE WAY CALLING	12. CALLING LINE IDENTIFICATION (CL.)	14. ECHO CANCELING (EC) AND NOISE REDUCTION (NR)	15. VOICE RECOGNITION ACTIVATION	16. ATTACH A PHONE NUMBER TO A VOICE TAG	17. ABILITY TO TRANSMIT DTMF CODES	18. REMOTE AUDIO VOLUME CONTROL	FIG. 34	
	NAG					_			_	_	×	×	O(note 3)	≥	0	0	0	Σ	0	FI	
	SUPPORT IN AG	W	×	≊	Σ	0	Σ	Σ	Σ	≥	<		90							!	
3400	FEATURE	1. CONNECTION MANAGEMENT M		AUDIO CONNECTION HANDLING	ACCEPT AN INCOMING VOICE CALL	5. REJECT AN INCOMING VOICE CALL 0	TERMINATE A CALL	AUDIO CONNECTION TRANSFER DURING AN ONGOING CALL	8. PLACE A CALL WITH A PHONE NUMBER SUPPLIED BY THE HF	PLACE A CALL USING MEMORY DIALING	PLACE A CALL TO THE LAST NUMBER DIALED	ATION		12. CALLING LINE IDENTIFICATION (CLI)	ECHO CANCELING (EC) AND NOISE REDUCTION (NR)		DICETAG	1	18. REMOTE AUDIO VOLUME CONTROL	3470	

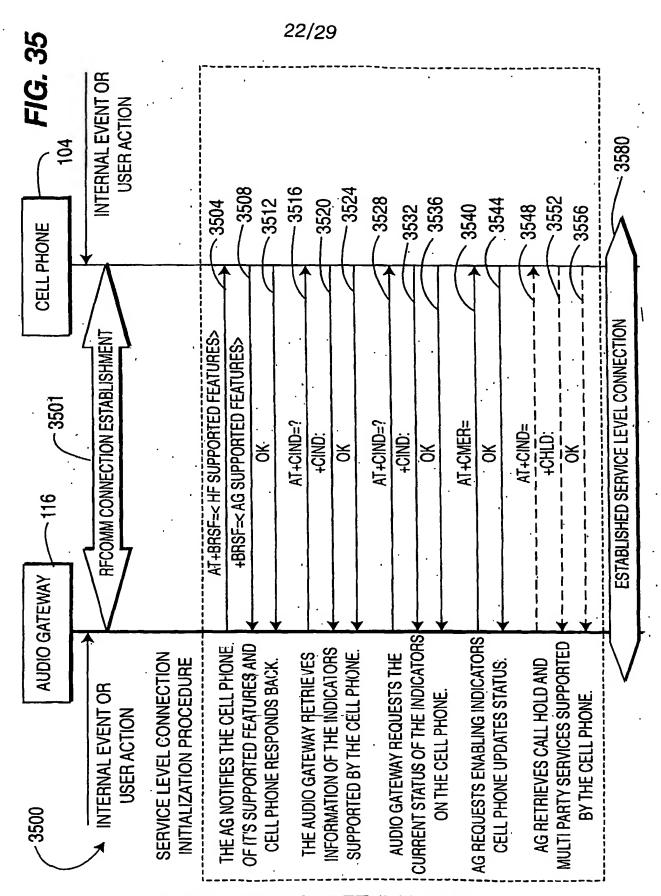

SUBSTITUTE SHEET (RUUE 26)

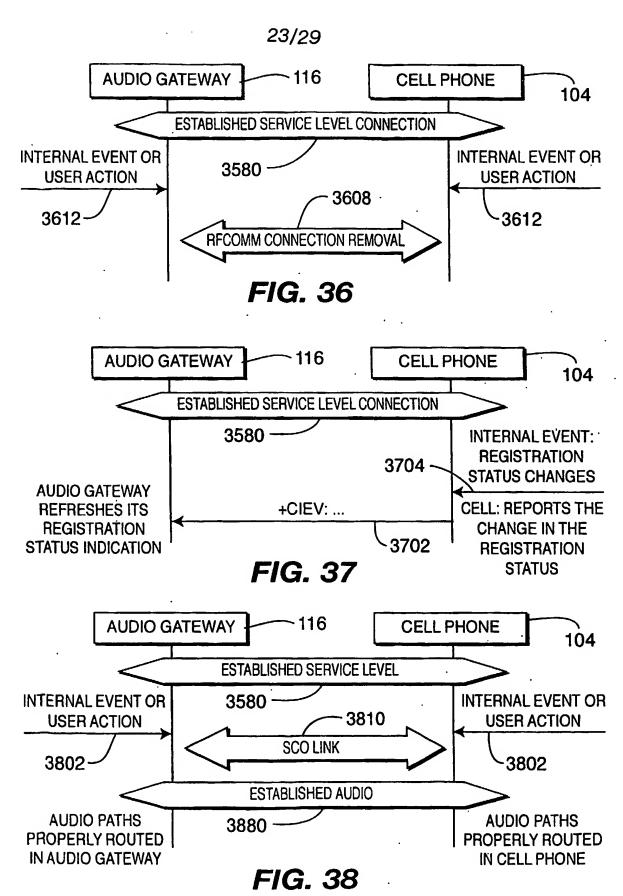

SUBSTITUTE SHEET (RUILE 26)


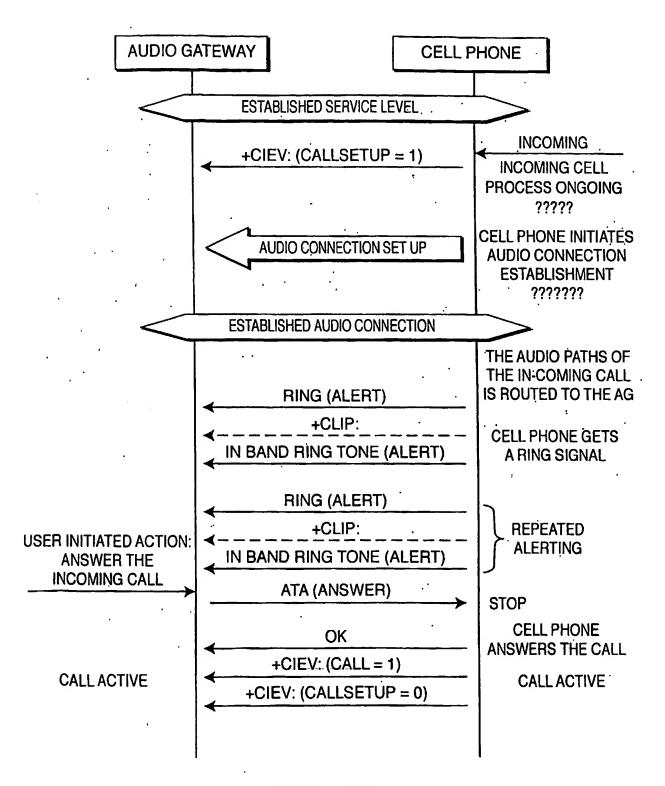


FIG. 39

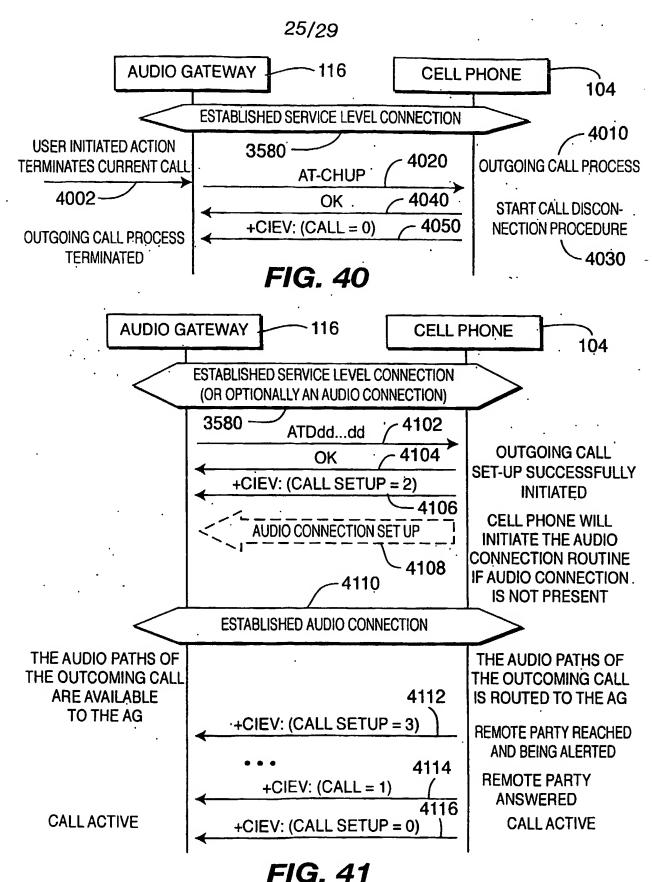

SUBSTITUTE SHEET (RUI F 26)

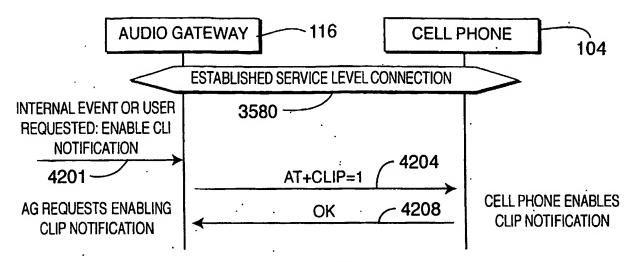


FIG. 42


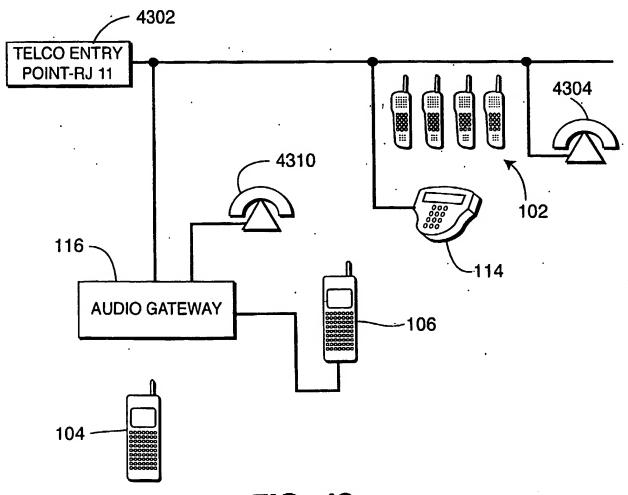


FIG. 43



SURSTITUTE SHEET (RUI F 26)

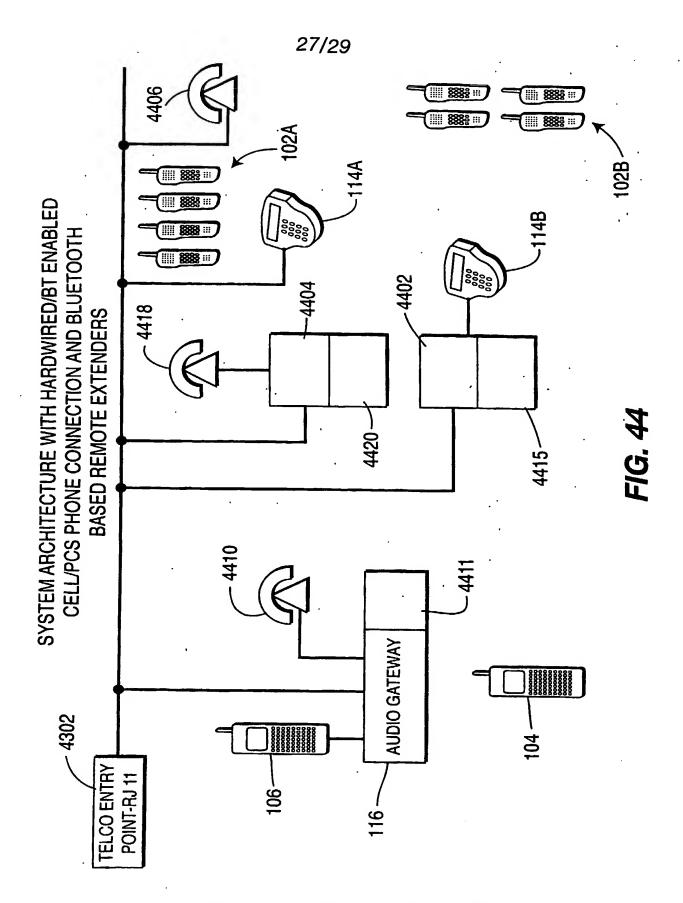